

Sanipack Pro ^{UP}



5 m
100 m



PRODUCT BENEFITS

- The macerator for wall-hung toilets that can be discreetly hidden from view
- Easy maintenance with double access to the product
- Allows for a complete shower room

CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40/100 mm

- Direct access to the basket in case of blockage due to improper use of the device without dismantling the device and without emptying the tank




Single blade cutter

PACK CONTAINS

Sanipack Pro Up, non-return valve, connectors, activated carbon filter included to neutralise odours

CURVE

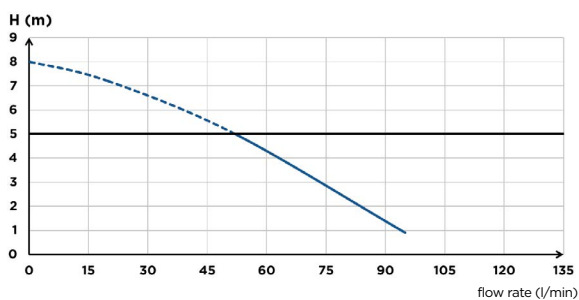

— recommended max height: 5 m

TECHNICAL FEATURES

Number of inlets	3
External inlet diameter	40/100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35°C
Min. shower tray height	130 mm
Installation in relation to the WC bowl	max. 50 cm
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Noise level	47 dB(A)
Identification and logistics	
Gross weight	7 kg
EAN code	3308815074078
Product code	6052

DIMENSIONS

