

APPLICATIONS



Commercial premises

PUMPING DISTANCE

13 m



WARRANTY



SANICUBIC® 2 Classic
Product Code:
6103

Barcode:
EAN 3308815074443




Control box
(4m Cable)



Wired, audible
and visual alarm
box (5m cable)



SANICUBIC® 2 Classic

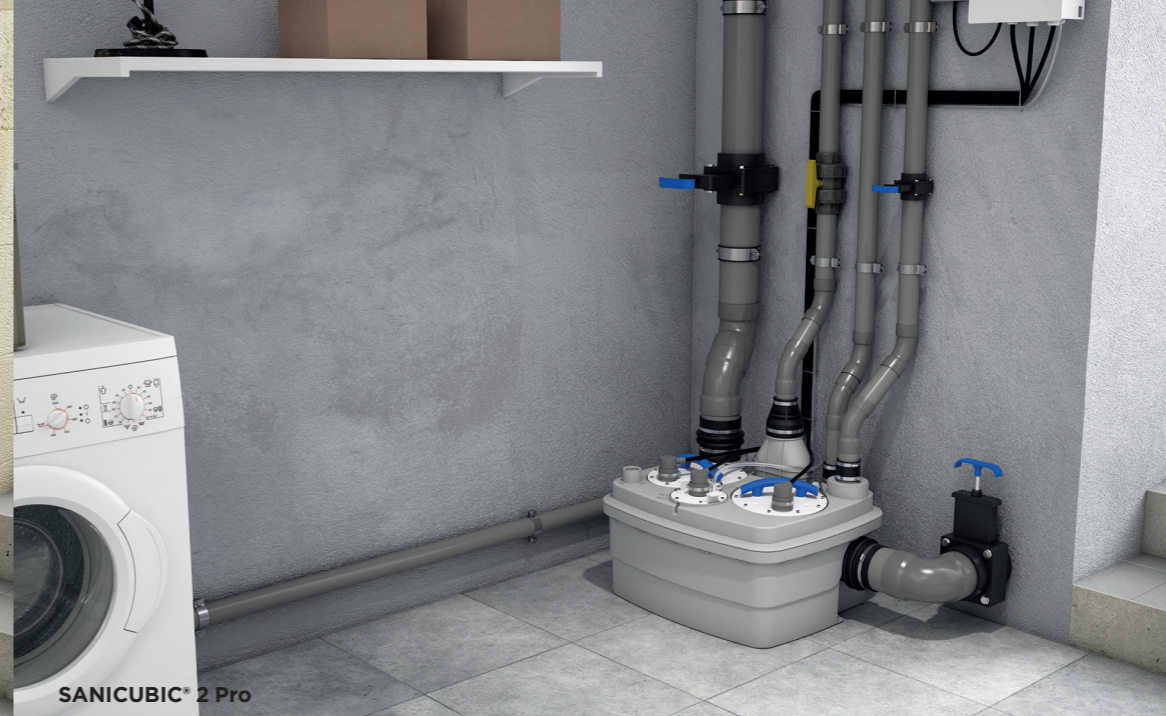

SANICUBIC® 2 Pro

APPLICATIONS



Commercial premises

PUMPING DISTANCE

13 m



WARRANTY



SANICUBIC® 2 Pro
with classic box
Product Code: 6102

Barcode:
EAN 3308815074450

SANICUBIC® 2 Pro
with SMART box
Product Code:
6102SMART

Barcode:
EAN 3308815075457



Control box
(4m Cable)



Interactive SMART
control box



Wireless alarm
unit (HF)

SANICUBIC® 2 Classic

SANICUBIC® 2 Pro



Less chance of clogging
due to the Pro X K2 grinder.

2 motors for peace of mind (alternative and simultaneous operation in the event of an alarm), **ideal for small commercial building and public places.**

Removable motors and level sensors for ease of maintenance.

Control and alarm boxes for security alerts.


IP68 Certified waterproofing.



Compact.

Several inlets available for greater flexibility of installation.

Discreet installation with a **DN40 outlet (ext 50 mm).**

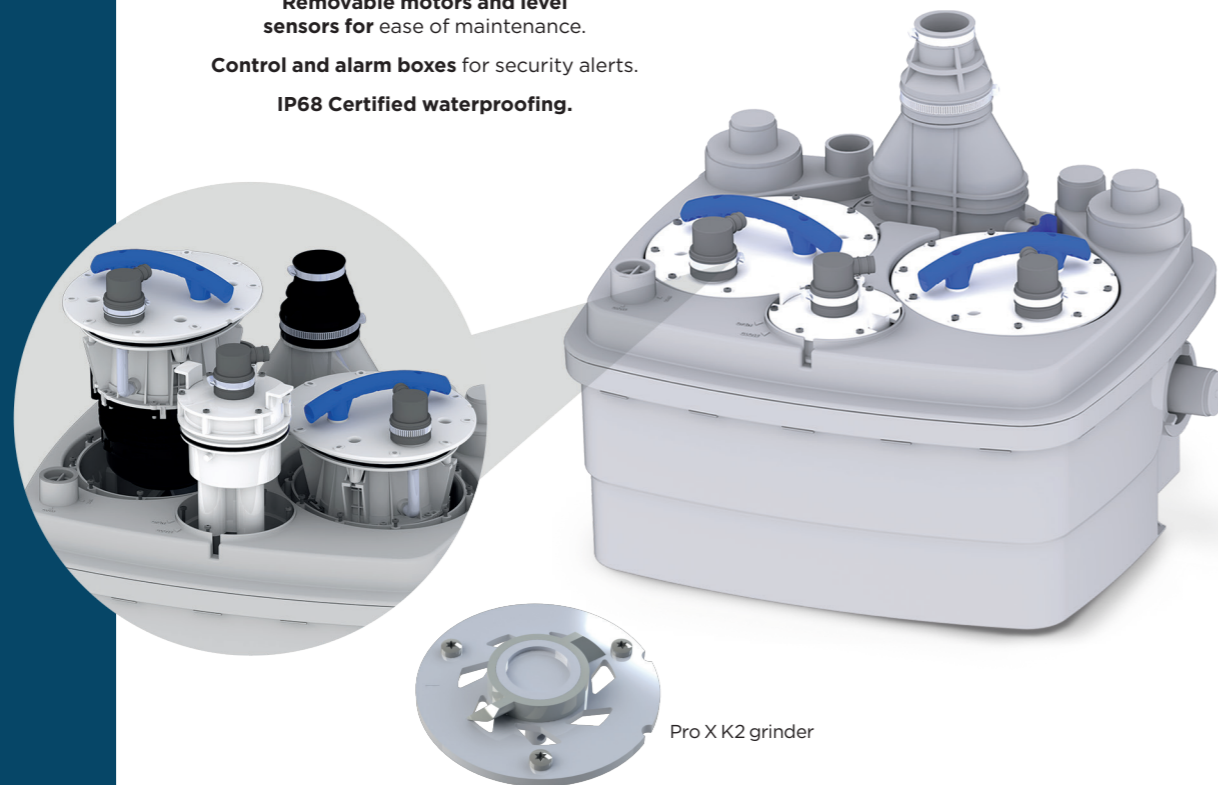

Pro X K2 grinder

ACCESSORIES

ISOLATION VALVES
Guillotine valves
for inlet pipes

In order to comply with the regulations and to facilitate maintenance operations, isolation valves must be installed on the black water inlets as well as on the discharge pipe.



For pipe 50 mm diameter
DN50
Product Code: 1109
Barcode: EAN 3308815061030
For pipe 110 or 100 mm diameter
DN100
Product Code: 1107
Barcode: EAN 3308815061023


ACTIVATED CARBON FILTER

Neutralises odours.

Can be used
with SANICUBIC®
Product Code: 1108
Barcode:
EAN 3308815076867




SEMI-TRANSPARENT VIEW

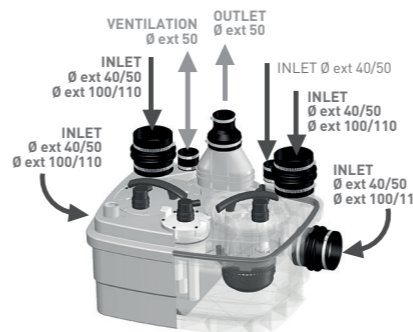


TECHNICAL FEATURES

TANK	
Tank volume	45 L
Ø Inlet	• 1 inlet DN 40/50 (Ø ext. 40/50 mm) • 4 inlets DN 40/50/100/110 (Ø ext. 40/50/100/110 mm)
Ø Discharge pipework	DN 40 (ext. 50 mm)
Ø Ventilation	50 mm
Maximum incoming water temperature	70°C intermittently (5 mins max)
Possible connections	Sewage water from several toilets, grey water from bathroom, kitchen, utility room
Flow rate	13 m³/h
Max height (Q=0 l/min.)	13 m
Maximum recommended height	11 m
Voltage	220-240 V / 50 Hz
Motor power	2 x 1500 W
Maximum current	13 A
On/off level	140/80 mm
Alarm level	210 mm
Weight (including accessories)	35 kg
IP rating	IP68
IP rating of control box	IPX4
Electrical class	Single phase

PUMP CURVE

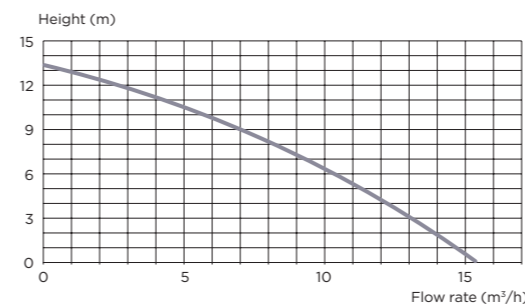

SMART BOX - 2 MOTORS

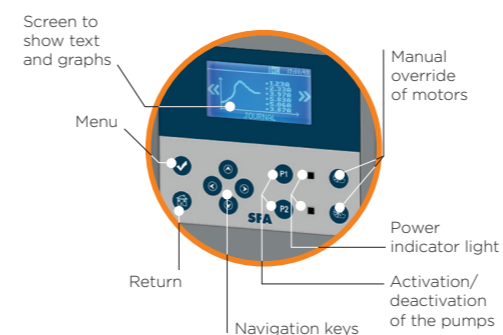

PACKAGING

- Lifting station with 2 motors
- 2 Integrated non-return valves
- Alarm box
- Control box
- GTB connectors: dry contact for alarm