Saniflo **%SFA**

Sanifos 280

Grey water, storm water

The Sanifos 280 is a grey water lifting station designed to lift the waste water from a larger household: WC, sink, washing machine etc. It consists of a 280 litre tank and a pump with float switch. It is available in 2 different pump versions: grinder with Pro X K2 technology or vortex. Sanifos 280 comes with its own pipework with shut-off valve and non-return valve and the bottom of the tank is self-cleaning. A 30 cm extension is available as an option.



PERFORMANCE

- Total head: 10 m
- Max. flow rate: 13 m³/h

DEPENDING ON MODEL

PRODUCT BENEFITS

- Easy installation: preassembled elements
- 3 drilling zones available for incoming water connections
- Automatic operation
- Bottom of the tank is self-cleaning
- Non-return valves and shut-off valves included



DELIVERED AS STANDARD



Sanifos 280 ZPK 40 A



Sanifos 280 Steel

• Tank with pre-assembled hydraulics, isolation valve and non-return valve, Sanisub ZPK 40 A or Sanisub Steel 50 A pump, PVC piping



Sanisub ZPK 40 A



Sanisub Steel 50 A



Closed impeller

OPTIONAL EXTRAS (SEE ACCESSORIES PAGES)

Sanifos 280 extension Barcode: 3308815081298 Product code: 40502




Sanifos alarm for 1 pump versions if required Barcode: 3308815081625 Product code: 40501



UNDERGROUND STATIONS

DIMENSIONS

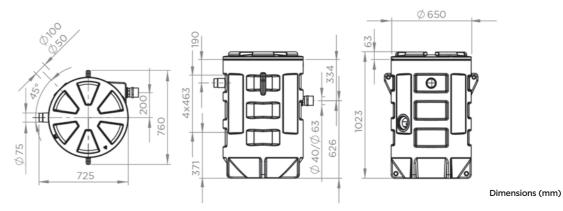

CURVE

H (m) Sanifos 280 Grinder Sanifos 280 Vortex flow rate (m³/h)

CONNECTIONS



	Sanifos 280 ZPK 40 A	Sanifos 280 Steel
Number of pumps	1	1
Material		
Tank	PE	PE
Pipework	PVC	PVC
Electrical features		
See electrical features for pump on page 84 and page 82 for the ZPK 40 A and sanisub steel		
Hydraulics		
Max. head (m)	10	7
Max. flow rate (m ³ /h)	13	9
External inlet diameter (mm)	50, 100	50, 100
External discharge diameter (mm)	50	50
External ventilation diameter (mm)	75	75
Total volume (L)	280	280
Min. incoming water connection (mm)	180	180
Max. incoming water connection (mm)	550	550
Max. incoming water connection if option is available (mm)	885	885
Type of impeller	Closed channel	Closed channel
Type of activation	float	float
Identification and logistics		
Gross weight (kg)	48.6	46.5
Barcode	3308815085968	3308815085975
Product code	31002	31003